




Part No. :
Aeration Shock Assembly Instructions

Exploded View 1:


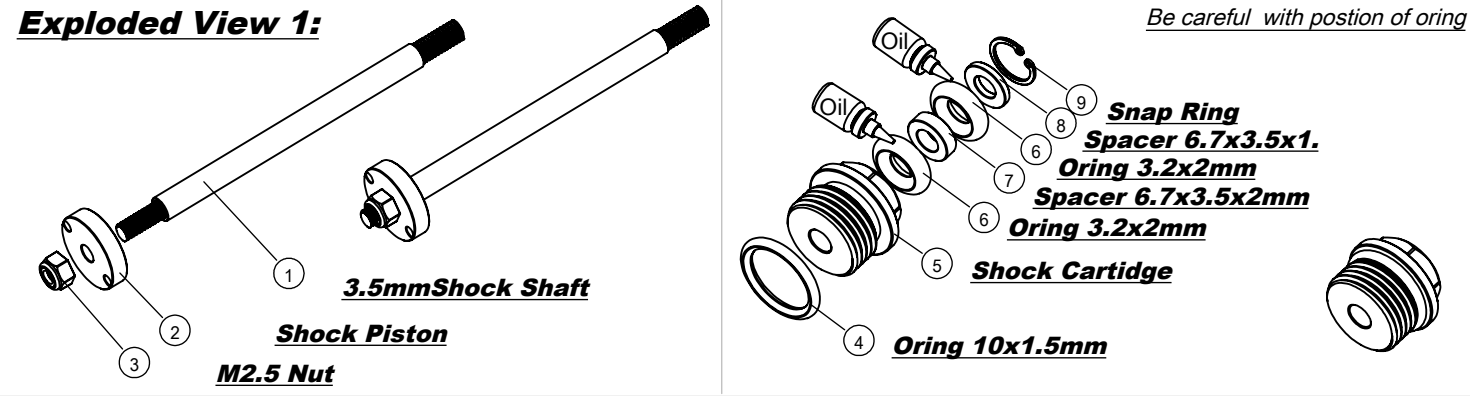


Shock Shaft


Shock Cartridge

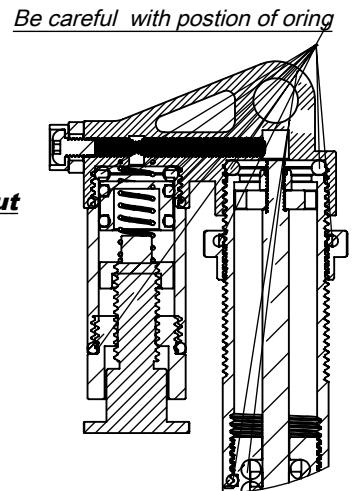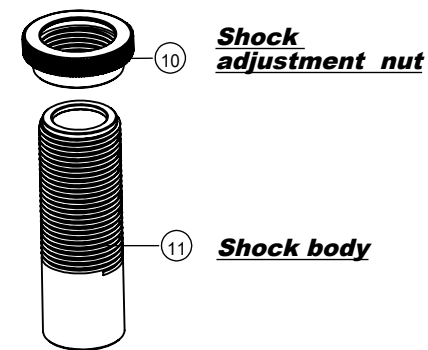


Exploded View 2:

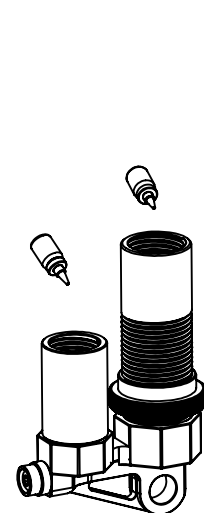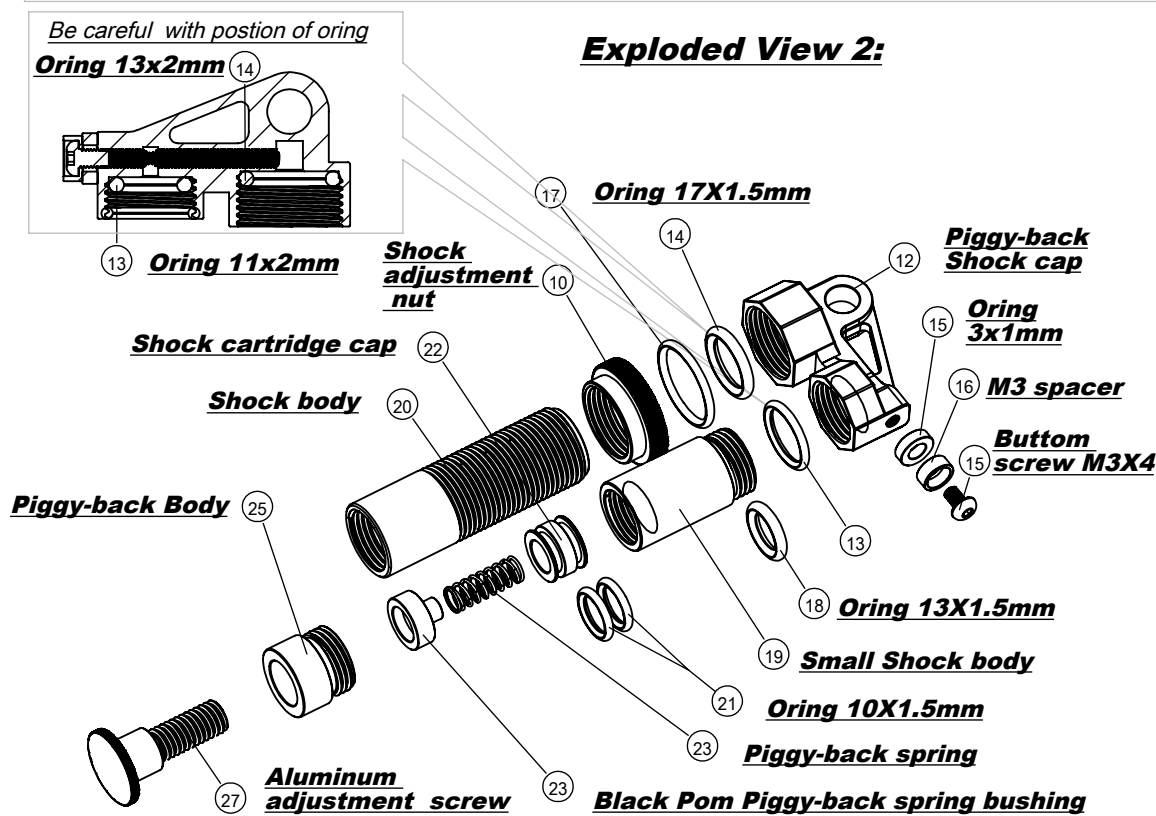


Fill in the shock cylinder with oil in proper amount And wait until The piggy-back cylinder will be filled with Oil

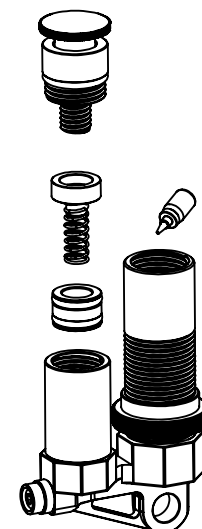


When Oil is full in The piggy-back Cylinder, Push in piggy-back piston Into the piggy-back cylinder.



Fill the shock Cylinder, With oil to top of thread.

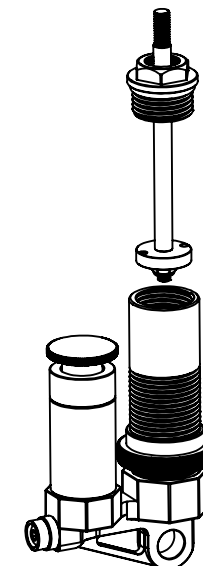


While pushing down the Piggy-back piston, Press in the shock piston Slowly all the way to bottom.




While pushing down the Piggy-back piston, And shock shaft Tighten cartridge slowly.

Exploded View 3:

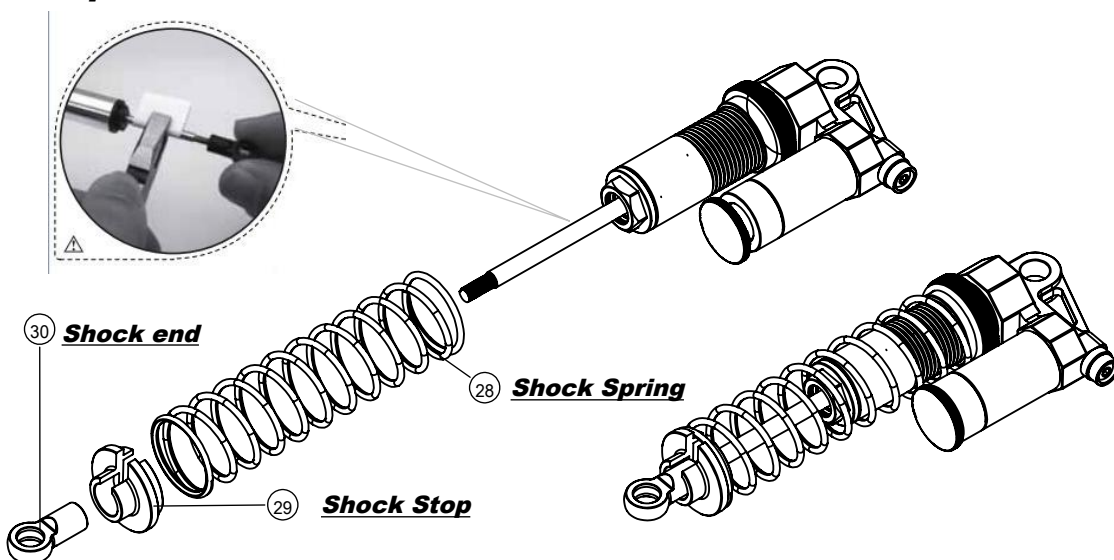


Piggy-back pressure setting

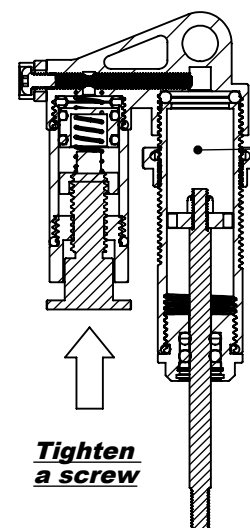

By screwing the hex tap Screw a little tightly or Loosely the internal Pressure of cylinder Can be adjusted.

Pressure up

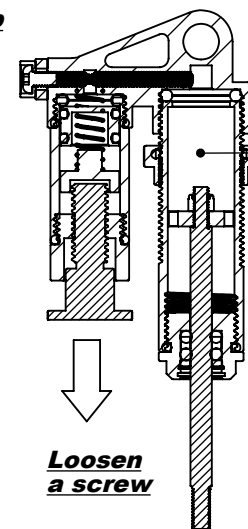

Pressure Down

Number	Name	Type/Size	Qty (Pcs)

For more information.
Please visit our website: [http:// www.hot-racing.com](http://www.hot-racing.com)